

KENT

THE FLAME OF THE FUTURE



MADE FOR AUSTRALIA | AUSTRALIAN OWNED & OPERATED



There's nothing more comforting than sitting in front of a roaring wood fire and enjoying the warmth it brings to your home.

At Kent, we have designed a wide range of heaters to suit any space, style and budget to ensure your family is kept warm on even the coldest nights.

Sleek, modern design or rustic traditional charm – you'll find a Kent wood heater that's right for you.

Kent wood heaters are designed and tested in Australia for the harshest of Australian winters

10 YEAR
FIREBOX STRUCTURAL
WARRANTY
★ ★ ★ ★ ★



3 speed fan control helps circulate heat. Available on all convection heaters



Firebox is lined with **firebricks** or **Hi Tech Refractory Lining**



Self-cleaning large door glass for an unobstructed view of your fire

Kent heaters are more efficient than ever and better for you and the environment!

Our range of heaters burn up to 2 times cleaner than the national standard for emissions. Plus, the increased efficiency means your heater will burn less fuel to heat your home.

Installation

We strongly recommend the use of a Maxiheat flue system and professional installer. Maxiheat flue systems are designed, tested in Australia to meet the relevant Standard AS/NZS 2918. It is important to check local regulations prior to installation as well as specifications provided in the instruction manual. For more information visit our website (www.kentwoodheaters.com.au)

KENT
THE FLAME OF THE FUTURE

Fairlight



Freestanding

KTFL17MB

Product Specifications

Heater: 780H x 981W x 496D mm

Bench: 315H x 1190W x 496D mm

Coverage: up to 300m²

Peak Heat Output: 14.9kW

Burn Time: up to 8.5 hours

Maximum Log Size: 330-700mm

Construction: 5mm with Hi-Tech Refractory lining

Firebox Size: 0.06m³ steel firebox

Baffle: 25mm Hi-Tech Refractory baffle

Fan: 2 x single barrel 3 speed remote controlled fans

Warranty: 10 Year Firebox

..... Dual fans with remote control

BurnWise An initiative of the Australian Home Heating Association

EFFICIENCY	This model	67%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7g/kg
	Australian Standard	<1.5g/kg



Modern landscape design

Insert

KTFLIN17MB

Product Specifications

Coverage: up to 280m²

Peak Heat Output: 10.9kW

Burn Time: up to 8 hours

Maximum Log Size: 330-700mm

Construction: 5mm with Hi-Tech Refractory lining

Firebox Size: 0.06m³ steel firebox

Baffle: 25mm Hi-Tech Refractory baffle

Fan: 2 x single barrel 3 speed remote controlled fans

Warranty: 10 Year Firebox

Includes: Zero Clearance Box

BurnWise An initiative of the Australian Home Heating Association

EFFICIENCY	This model	60%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7g/kg
	Australian Standard	<1.5g/kg

Calisto

Medium Insert

KTCAMED18MB

Product Specifications

Coverage: up to 280m²

Peak Heat Output: 10.8kW

Burn Time: up to 7.5 hours

Maximum Log Size: 370mm

Construction: 6mm

Firebox Size: 0.07m³ steel firebox

Baffle: 25mm Hi-Tech Refractory baffle

Fan: 3 speed

factory fitted

Warranty: 10 Year Firebox

Zero Clearance compatible^{MXZEROBX}

BurnWise

An initiative of the Australian Home Heating Association

EFFICIENCY	This model	62%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.9g/kg
	Australian Standard	<1.5g/kg




Zero Clearance installation

Transform a dull blank wall into a magnificent fireplace without major structural alterations or existing brick chimney. Simply purchase a Zero Clearance box and flue kit (MXZEROBX + MXFK3Z) with any Kent Calisto heater and enjoy the benefits of a built in fireplace without the extensive construction.

Refer to instruction manual or website (www.kentwoodheaters.com.au) for additional information, including minimum clearances and hearth specifications.

* Drawing is a guide only

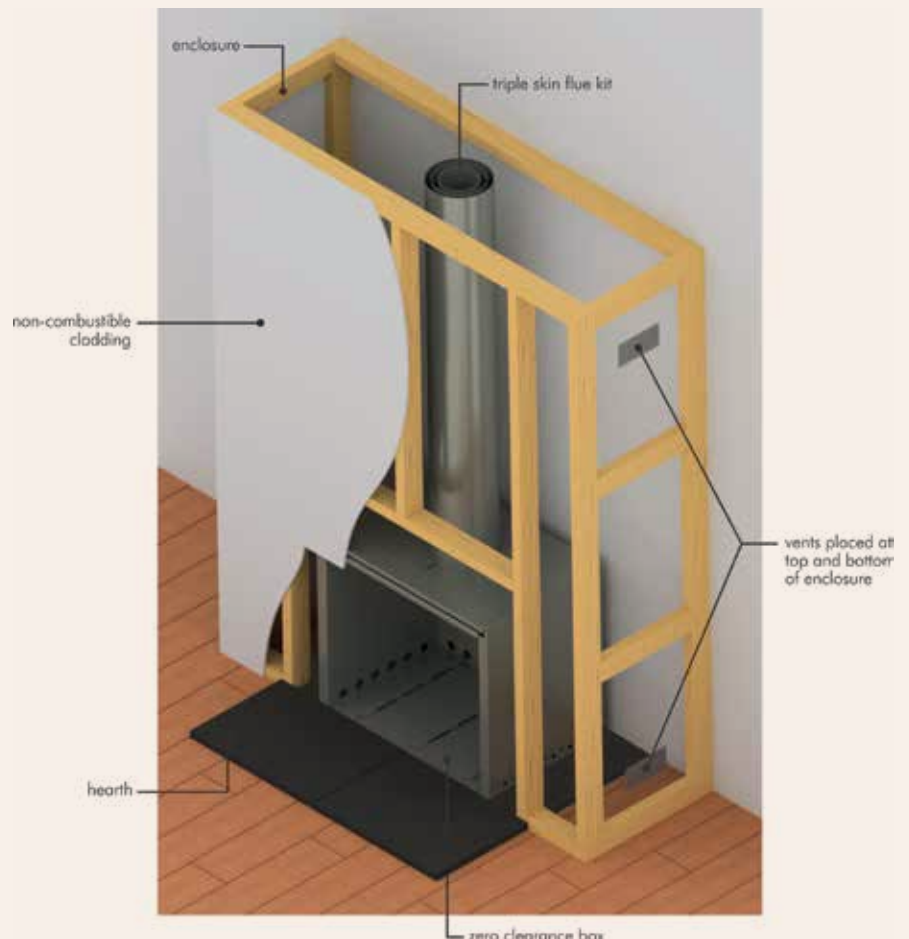

Striking in design with minimalist lines, the 'Calisto' series will add a touch of modern style to any home. This stunning range features some of the cleanest burning models on the market, burning up to 2 times cleaner than the national standard for emissions.

Small

KTCASML18MB

Product Specifications

886H x 609W x 508D mm

Coverage: up to 200m²

Peak Heat Output: 12.1kW

Burn Time: up to 7 hours

Maximum Log Size: 320mm

Construction: 6mm steel

Firebox Size: 0.04m³ steel firebox

Baffle: 25mm Hi-Tech Refractory baffle

Fan: Push button 3 speed factory fitted

Warranty: 10 Year Firebox Zero Clearance Box



BurnWise		An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	69%	
	Australian Standard	>60%	
PARTICLE EMISSIONS	This model	0.7g/kg	
	Australian Standard	<1.5g/kg	

Medium

KTCAMED18MB

Product Specifications

936H x 669W x 558D mm

Coverage: up to 300m²

Peak Heat Output: 12.3kW

Burn Time: up to 8.5 hours

Maximum Log Size: 370mm

Construction: 6mm steel

Firebox Size: 0.07m³ steel firebox

Baffle: 25mm Hi-Tech Refractory baffle

Fan: Push button 3 speed factory fitted

Warranty: 10 Year Firebox



BurnWise		An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	75%	
	Australian Standard	>60%	
PARTICLE EMISSIONS	This model	0.6g/kg	
	Australian Standard	<1.5g/kg	

Large

KTCALGE18MB

Product Specifications

986H x 769W x 558D mm

Coverage: up to 320m²

Peak Heat Output: 16.6kW

Burn Time: up to 9.5 hours

Maximum Log Size: 370mm

Construction: 6mm steel

Firebox Size: 0.1m³ steel firebox

Baffle: 25mm Hi-Tech Refractory baffle

Fan: Push button 3 speed factory fitted

Warranty: 10 Year Firebox



BurnWise		An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	64%	
	Australian Standard	>60%	
PARTICLE EMISSIONS	This model	0.7g/kg	
	Australian Standard	<1.5g/kg	

Country Classic MKII



Country Classic MKII

KTCC19MB

Product Specifications

840H x 737W x 567D mm
 Coverage: up to 300m²
 Peak Heat Output: 17.3kW
 Burn Time: up to 8.5 hours
 Maximum Log Size: 390mm
 Construction: 6mm steel
 Firebox Size: 0.09m³ steel firebox
 Baffle: 8mm steel
 Fan: 3 speed factory fitted
 Warranty: 10 Year Firebox



This traditional style is perfect for heating medium to large sized spaces. The large glass viewing window will ensure everyone enjoys a view of the crackling fire.

BurnWise

An initiative of the Australian Home Heating Association

EFFICIENCY	This model	76%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7g/kg
	Australian Standard	<1.5g/kg

Somerset MKII

KTSM19MB

Product Specifications

790H x 677W x 517D mm
 Coverage: up to 200m²
 Peak Heat Output: 10.9kW
 Burn Time: up to 8 hours
 Maximum Log Size: 370mm
 Construction: 6mm steel
 Firebox Size: 0.06m³ steel firebox
 Baffle: 8mm steel
 Fan: 3 speed factory fitted
 Warranty: 10 Year Firebox



Perfect for heating small to medium sized spaces. Constructed of solid 6mm steel, this Kent wood heater is strong and efficient.

BurnWise

An initiative of the Australian Home Heating Association

EFFICIENCY	This model	72%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.0g/kg
	Australian Standard	<1.5g/kg

Jindabyne

KTJB16MB

Product Specifications

785H x 560W x 525D mm
 Coverage: up to 180m²
 Peak Heat Output: 13.3kW
 Burn Time: up to 7.5 hours
 Maximum Log Size: 370mm
 Construction: 6mm steel
 Firebox Size: 0.06m³
 Baffle: 6mm steel
 Warranty: 10 Year Firebox



Perfect for smaller spaces, the Jindabyne is rustic in design. The included trivet accessory is perfect for cooking soups and stews or boiling the kettle.

BurnWise

An initiative of the Australian Home Heating Association

EFFICIENCY	This model	69%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.2g/kg
	Australian Standard	<1.5g/kg

FREESTANDING HEATERS All measurements are in mm	Flue Configuration	Rear Wall	Side Wall	Corners	Hearth Front	*Hearth Min Dimensions		Rear to Flue Centre	**Recommended Maxiheat Hearth
		A	B	C	D	Width	Depth	F	
JINDABYNE	Maxiheat Standard Default Stainless Kit (MXFKT3SS)	475	800	525	300	850	850	175	MXTH12GRY/BLK2
	Maxiheat Standard Default Stainless Flue Kit with single shield (MXFKT3SS + additional MXRSIS2)	250							
	Maxiheat Decromesh Default Flue Kit (MXFKDEC3K)	150							
	Maxiheat Standard Default Stainless Flue Kit with double shields (MXFKT3SS + additional MXRSIS2 & MXRS0B2 or MXFTK3K)	150							
SOMERSET MKII	Maxiheat Non-Perforated Flue Kit with inner shield (MXFKSD3MB)	250	325	100	300	885	799	199	MXTH12GRY/BLK2
	Maxiheat Decromesh Default Flue Kit with spigot shield (included with heater) (MXFKDEC3MB)	200							MXTH1GRY/BLK2
	Maxiheat Standard Metallic Black Flue Kit with double shields (MXFTK3MB)	450							
COUNTRY CLASSIC MKII	Maxiheat Non-Perforated Flue Kit with inner shield (MXFKSD3MB)	250	325	100	300	945	849	199	MXTH12GRY/BLK2 or MXFSH12DBLK
	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	200		100					
	Maxiheat Standard Metallic Black Flue Kit with double shields (MXFTK3MB)	200		70					
CALISTO SMALL	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	70	120	10	300	875	807	182	MXTH1GRY/BLK2
	Maxiheat Non-Perforated Flue Kit with inner shield (MXFKSD3MB)		150						
CALISTO MEDIUM	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	70	240	50	300	935	832	182	MXTH1GRY/BLK2
	Maxiheat Non-Perforated Flue Kit with inner shield (MXFKSD3MB)								
CALISTO LARGE	Maxiheat Decromesh Default Flue Kit with OUTER heat shield (MXFKDEC3MB + additional MXRS0B2)	150	400	200	470	1035	1032	182	MXTH12GRY/BLK2 or MXFSH12DBLK
	Maxiheat Non-Perforated Flue Kit with inner shield (MXFKSD3MB)			100					
FAIRLIGHT	Maxiheat Standard Metallic Black Flue Kit with double shields (MXFTK3MB)	200	300	25	400	1190	861	179	MXTHSQ12GRY/BLK2
	Maxiheat Decromesh Default Flue Kit with inner & outer shields (MXFKDEC3MB + additional MXRSIS2 & MXRS0B2)								
	Maxiheat Non-Perforated Flue Kit with inner & outer rear shield (MXFKSD3MB + additional MXRS0B2)								

* Minimum Hearth Dimensions: These are minimum measurements required to meet the Australian Standard AS/NZS2918 (Note: will not cover floor from rear of heater to wall)


** Recommended Hearth: Recommended hearth to ensure all requirements are met including covering the floor for rear of heater to wall.

Fairlight Freestanding requires a 40mm thick hearth. Including 18mm air gap beneath.


With all freestanding and inbuilt heaters, use a non-combustible hearth to protect your flooring and its surrounding area.

Refer to instruction manual or website (www.kentwoodheaters.com.au) for additional information, including minimum clearances and hearth specifications.

STANDARD INSTALLATION FREESTANDING



CORNER INSTALLATION FREESTANDING



INSERT HEATERS All measurements are in mm	Fascia (mm)		Cabinet (mm)			Hearth (mm)	Rear of Fascia to Centre Flue
	Height	Width	Height	Width	Depth		
FAIRLIGHT INSERT ZERO CLEARANCE	626	1145	651	1071	550	600(D) x 1200(W) x 56 thick including a 15mm air gap (MXTHINSBLK/GRY or equivalent)	292
CALISTO MEDIUM INSERT	675	800	599	638	466		318
CALISTO MEDIUM ZERO CLEARANCE	746	821	817	838	578		318

Refer to Instruction manual for installation specifications such as clearances to combustible materials and hearth construction. Peak heat output and burn times may vary depending on fuel type, moisture content and loading. Kent wood heaters have been tested with Maxiheat flue systems and comply with the MOST RECENT Australian Standards AS/NZS2918. Heating output may vary depending on climate conditions and house design.

All insert heaters must be installed in a full masonry cavity as per the MOST RECENT Australian Standards AS/NZS2918. All Kent insert wood heaters have been tested with a 56mm thick hearth which includes a 15mm air gap. Details provided in this brochure regarding the installation of a Zero Clearance system are for information purposes only and should not be relied upon as full installation instructions. Due to on-going product development, details and specifications for the wood heater collection may be subject to change without notice. Please check with your local retailer.

YOUR KENT DEALER



KENT
THE FLAME OF THE FUTURE

GLG Australia Pty Ltd
Building A2, Campus Business Park
350-374 Parramatta Rd, Homebush NSW 2140
Ph 02 9735 4129 info@kentwoodheaters.com.au
www.kentwoodheaters.com.au